

Apache Lifts



Model#: AP4-14S
Surface Mounted
14,000 lb. 4-Post Lift

**14,000 LB
4-POST LIFT**

Apache Lifts AP4-14S and AP4-14E 14,000 lb. economy four post lifts are a perfect fit for the service center looking for a professional lift that leaves room to grow. With its competitive price, solid piece column construction, louvered approach ramps, automatic wheel stops and more technician headroom underneath, the Apache AP4-14S and AP4-14E has all the great features you'd expect in a professional four post lift.

Optional 7,500 lb. capacity rolling jacks, bolt-on alignment kit, oil drain pans are available to turn these general service racks into complete alignment capable lifts, resulting in the total productivity solution.


Available in red and blue only.

FEATURES AND BENEFITS:

- Louvered approach ramps for positive vehicle traction
- Solid piece column construction provides rigidity and stability for rigorous servicing needs
- The highest rise in the industry provides more working room underneath vehicles
- Oversized solid machined steel pulleys for prolonged pulley and cable life
- Adjustable runways to accommodate a variety of tread widths
- Hydraulic cylinder mounted underneath runway
- 14 level locking positions for a variety of general service tasks
- Optional bolt on alignment kit converts general service application into alignment rack
- Many accessories available such as air/electric workstation, rolling jacks and oil drain pan make Apache 4-posts a complete productivity center

Louvered Approach Ramps

Apache Lifts' AP4-14S and AP4-14E 4-Post lifts feature louvered approach ramps for tire traction and sleek look.




Rolling Jacks-AP-RJ7.5

Optional 7,500 lb. capacity rolling jacks allow brake and wheel access, broadening potential service revenue.

Model Number	AP4-14S	AP4-14E
Lifting Capacity	14,000 lb. (6350kg)	
Max. Wheelbase ¹	182 1/2" (4636mm)	210" (5334mm)
A Rise Height	78" (1981mm)	
B Length Overall	20' 5 3/4" (6242mm)	22' 9 1/4" (6940mm)
C Width Overall	10' 10 3/4" (3321mm)	
D Inside Columns	116" (2946mm)	
E Between Columns	196" (4978mm)	223 1/2" (5677mm)
F Height of Columns	90 1/2" (2299mm)	
G Width of Runways	20" (508mm)	
H Height of Runways	7 1/4" " (184mm)	
I Width Between Runways (Minimum / Maximum)	40" / 43" (1016mm / 1092mm)	
Air Supply Required	85-120psi	
Motor	2HP	
Voltage (1 Phase Std.) ²	208-230 Volt	
Speed of Rise	90 Sec.	
Minimum Recommended Bay Size	12' x 24' (3658mm x 7315mm)	12' x 26' (3658mm x 7925mm)

¹ Maximum wheelbase is based on a tire diameter of 30". | ² Optional 3 phase electrical also available. Available in Red and Blue only.

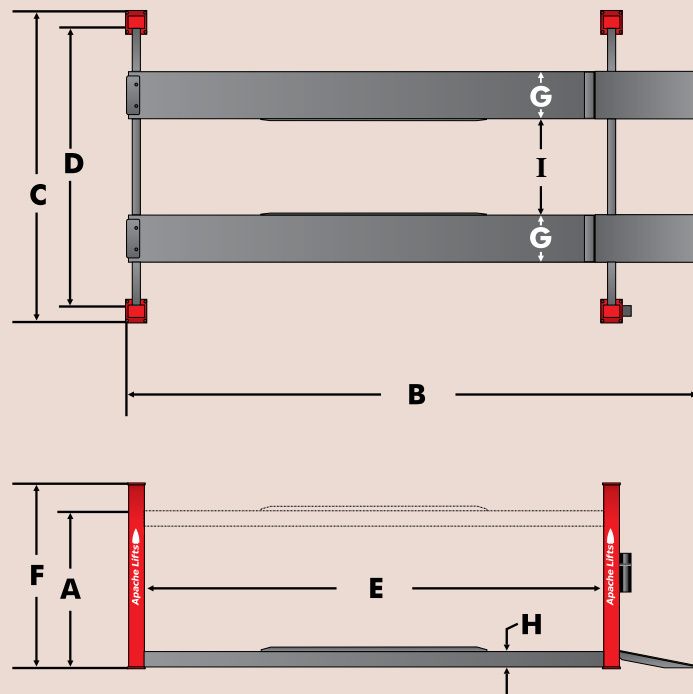

FOR MORE INFORMATION CONTACT YOUR AUTHORIZED APACHE LIFTS DISTRIBUTOR



The Automotive Lift Institute (ALI) certifies that the AP4-14S and AP4-14E described herein comply with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2011 and are Third Party Validated by the ETL Testing Laboratory.

Apache Lifts Innovations
a division of Hergott
Automotive Equipment Inc.
37 McAllister Dr.
Bloomingdale ON, NOB 1K0

800-461-1692
p: 519-658-3738
f: 519-569-7249
sales@apachelifts.com

Apache Lifts Innovations reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.