

Apache Lifts

**15,000 LB
4-POST LIFT**



Model#: AP4-15EOAR

Alignment Rack package
15,000 lb. 4-Post Lift

Apache AP4-15 four post lifts offer a 15,000 lb. lifting capacity and come in both open and closed front alignment and general service flat deck models. Open front models facilitate easy walk through access to undercarriage, expanding service potential and profit dollars. These lifts accommodate small passenger cars to heavier fleet operation vehicles, up to 210" wheelbase. Alignment models support the latest camera imaging equipment and can handle 2 wheel alignments up to 194".

Stainless Steel Radius Gauges

The Apache Alignment Lifts come complete with corrosion resistant stainless steel turning radius gauges. These gauges are compatible with today's latest 3D alignment systems.

Rolling Jacks

Apache Alignment Lifts come with two 7,500 lb. capacity rolling jacks allowing wheel, brake and alignment work to be performed. Available in red and blue only.

FEATURES & BENEFITS:

- 14 leveling positions for a variety of alignment and general service tasks
- Large 9-1/2" heavy-duty pulleys and 1/2" cable diameter for longer durability and added safety
- 78" rise provides more working room underneath vehicles for taller technicians
- Compatible with the industry's latest camera imaging alignment systems
- Recessed stainless steel turning radius gauges and full floating rear slip plates provide accurate readings
- Single point air lock release disengages safety locks in each column and auto engaging mechanical drop locks for additional safety
- Hidden lifting cylinder under deck for more accessibility

Model Number	Open Front				Closed Front			
	Alignment Rack Package		General Service Lifts		Alignment Rack Package		General Service Lifts	
	AP4-15S0AR	AP4-15E0AR	AP4-15S0	AP4-15E0	AP4-15SAR	AP4-15EAR	AP4-15S	AP4-15E
Lifting Capacity	15,000 lbs				15,000 lbs			
A Length Overall	249" (6325mm)	276" (7010mm)	249" (6325mm)	276" (7010mm)	244 1/2" (6210mm)	272" (6909mm)	244 1/2" (6210mm)	272" (6909mm)
B Width Overall	142" front - 134 1/2" rear (3607mm front - 3416mm rear)				134 1/2" (3416mm)			
C Inside Columns	120" front - 120" rear (3048mm front - 3048mm rear)				120" (3048mm)			
D Between Columns	195" (4953mm)	222 1/2" (5652mm)	195" (4953mm)	222 1/2" (5652mm)	196" (4978mm)	223 1/2" (5677mm)	196" (4978mm)	223 1/2" (5677mm)
E Height of Columns	99 1/2" front - 93 1/2" rear (2527mm front - 2375mm rear)				90 1/2" (2299mm)			
F Height of Runways	7" (178mm)				7" (178mm)			
G Width of Runways	20" (508mm)				20" (508mm)			
H Width Between Runways (Minimum / Maximum)	43" (1092mm)				40" / 43" (1016mm / 1092mm)			
I Maximum Wheelbase ¹	182 1/2" (4635mm)	210" (5334mm)	182 1/2" (4635mm)	210" (5334mm)	182 1/2" (4635mm)	210" (5334mm)	182 1/2" (4635mm)	210" (5334mm)
J Rise Height	78" (1981mm)				78" (1981mm)			
Max. 2 Wheel Alignment	166 1/2" (4229mm)	194" (4927mm)	N/A		166 1/2" (4229mm)	194" (4927mm)	N/A	
4 Wheel Alignment	88" - 158" (2235mm) - (4013mm)		N/A		88" - 158" (2235mm) - (4013mm)		N/A	
Air Supply Required	90-120 psi Clean & Dry				90-120 psi Clean & Dry			
Motor	2HP				2HP			
Voltage (1 Phase Std.) ²	208v-230v				208v-230v			
Speed of Rise	85 Sec.				85 Sec.			
Min Recomm. Bay Size	12' x 24'	12' x 26'	12' x 24'	12' x 26'	12' x 24'	12' x 26'	12' x 24'	12' x 26'

Specifications subject to change without notice.


¹ Maximum wheelbase is based on a tire diameter of 30"

² Single phase or Three phase electrical available. (Part #AC3PH4P at additional cost) - Specify at time of order.

Apache Lifts
— a division of Hergott Automotive Equipment Inc.


Louvered Approach Ramps

Apache Lifts' AP4-15S and AP4-15E 4-Post lifts feature louvered approach ramps for tire traction and sleek look.



Rolling Jacks - APRJ-75

Optional 7,500 lb. capacity rolling jacks allow brake and wheel access, broadening potential service revenue.

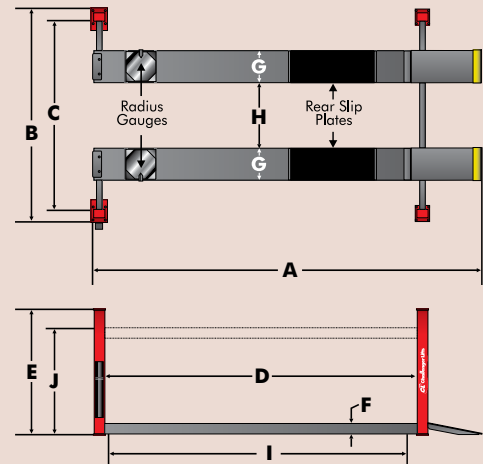

FOR MORE INFORMATION CONTACT YOUR AUTHORIZED APACHE LIFTS DISTRIBUTOR



The Automotive Lift Institute (ALI) certifies that the AP4-15S and AP4-15E described herein comply with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2006 and are Third Party Validated by the ETL Testing Laboratory.

Apache Lifts Innovations
a division of Hergott Automotive Equipment Inc.
37 McAllister Dr.
Bloomington ON, NOB 1K0

800-461-1692
p: 519-658-3738
f: 519-569-7249
sales@apachelifts.com

Apache Lifts Innovations reserves the right to make changes to specifications without notice and without making changes retroactive. Unloading, installation and oil not included.